



W 系列 截止式电磁换向阀
Series poppet valves

K23J-W 系列截止式电磁换向阀
series poppet valve 3/2-way

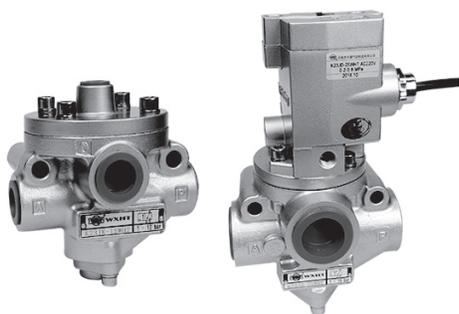

图形符号 symbols




产品特点 Features

K23J-W系列是二位三通管接截止式换向阀。该阀结构合理，动作可靠，维修方便，尤其适用于较为恶劣的工作环境。分电控和气控两种。

K23J-W series is 3/2 way poppet valve for line Mounting.Streamlined sructure, reliable action easy of maintenance,and especially suites to tough work conditions.Tow types:solenoid pilot control or Air remote pressure control


型号注释 Order Code

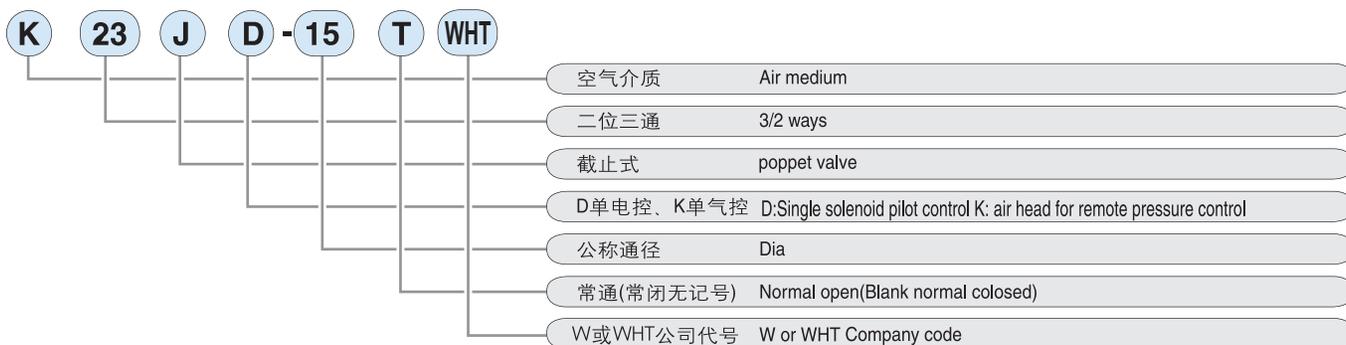

技术参数 Specification

型号 type	K23J-8W	K23J-10W	K22J-15W	K23J-20W	K23J-25W	K23J-32W	K23J-40W	K23J-50W	K23J-63W
流量 Flow rate(m ³ /h)	5	7	10	20	30	40	50	63	80
有效截面积S值 Effective sectional area(mm ²)	20	35	60	120	190	300	400	625	787.5
泄漏量 Leakage rate(cm ³ /min)	≤50	≤100	≤200	≤300	≤350				
换向时间 Direction diverting time(sec)	≤0.04	≤0.06	≤0.10	≤0.15	≤0.2				
切换频率 Switch-over frequency(Hz)	≥10	≥8	≥4	≥3	≥2				
工作压力 Working pressure(MPa)	0.2~0.8								
电压 Voltage(V)	AC:380,220,110,36; DC:220,110,24								
工作温度 Working temp.(°C)	-5~50								

外形尺寸 Outlook & Dimension

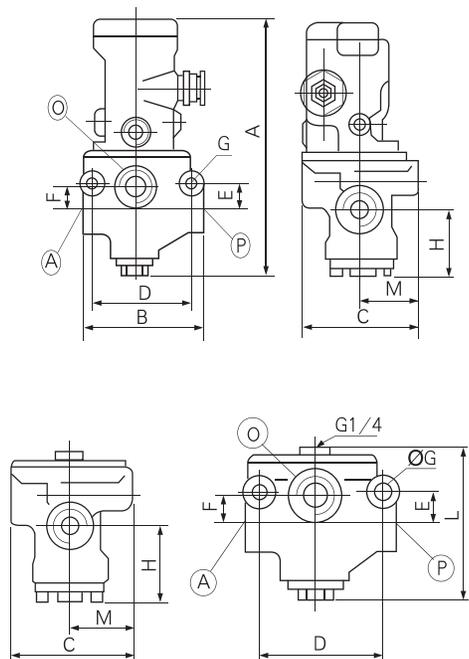

型号 Type	公称通径 Dia	接管螺纹 Threads (英制)G	A	B	C	D	E	F	G	H	M	L	O
			K23J-8 (T) WHT	Ø8	G1/4	180	96	78	73	17	16.5	Ø9	45
K23J-10 (T) WHT	Ø10	G3/8											
K23J-15 (T) WHT	Ø15	G1/2											
K23J-20 (T) WHT	Ø20	G3/4	195	113	89	82	24	21	Ø9	52	38	105	G1
K23J-25 (T) WHT	Ø25	G1											
K23J-32 (T) WHT	Ø32	G1½	268	165	121	118	37	48	Ø13	75	46	170	G1½
K23J-40 (T) WHT	Ø40	G1½											
K23J-50 (T) WHT	Ø50	G2	321	214	188	156	41	50.5	Ø13.5	97	99	247	G2½
K23J-63 (T) WHT	Ø63	G2½											